

Date

Name

Client

Project Name

Quote#




Type/Quantity

Specification Sheet

iMAX ADJUSTABLE TRIMLESS 50Hi

403 61 00

[Weblink](#)

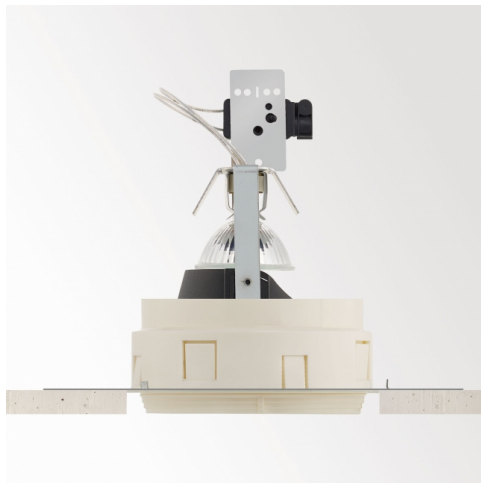

144



Opening formaat:  Ø KIT mm

Inbouwdiepte: 170 mm

ADJUSTABLE 0°-15° / 355°
MAINS DIMMING - TRAILING EDGE

GU10 // 100-240V / 50-60Hz

 1 x QPAR51 max.35W

Klasse: II

Gewicht: 0.2 KG

Protection level: IP20

Minimumafstand: 0,5m

Opmerkingen: Front cover to be ordered separately !
[Look at our iMAX configurator](#)


Benodigheden: MOUNTING KIT R102 TRIMLESS O.F.A.
iMAX COVER

Voor gedetailleerde installatie-instructies, raadpleeg de handleiding. [403 61 00 HAND.pdf](#)

iMAX ADJUSTABLE TRIMLESS 50Hi

403 61 00


Plafond mogelijkheden



Systeemplafond

Aleen met


MOUNTING KIT R102
TRIMLESS O.F.A.



Gipsplaat

Aleen met


MOUNTING KIT R102
TRIMLESS O.F.A.



Stucanet

Aleen met


MOUNTING KIT R102
TRIMLESS O.F.A.



Beton + pleister

Aleen met


MOUNTING KIT R102
TRIMLESS O.F.A.



Stalton + pleister

Aleen met

MOUNTING KIT R102
TRIMLESS O.F.A.



Welfsels + pleister

Aleen met

MOUNTING KIT R102
TRIMLESS O.F.A.

Weblink / Specificatieblad




MOUNTING KIT R102 TRIMLESS O.F.A.
400 91 02 OFA

Related references

DIVERSE

Weblink / Specificatieblad



IMAX COVER ROUND TRIMLESS
400 00 30

IMAX ADJUSTABLE TRIMLESS 50Hi

403 61 00

Gerelateerde project foto van product familie:

