

STRİPE

0.4

305151B4

GENERAL

Wall
Recessed
Jet Black
IP20
Interior
11 ^a to 19 ^b lm
RAL 9005 ^c

LED

3000 K
CRI 80
L90 / 50000 h
3-step binning

PHYSICAL

Length 35 mm
Width 37 mm
Height 70 mm
0.09 kg

ELECTRICAL

excl. power supply
3 V
Total connected power 1.4 ^a to 2.8 ^b W
350 ^a to 700 ^b mA
PC3
Safety distance 0.3 m



CUTOUT

Length 25 mm
Width 56 mm
Min. ceiling thickness 2 mm
Max. ceiling thickness 18 mm
Recessed depth 40 mm


^a 350mA

^b 700mA

^c RAL Palette colors may deviate slightly due to production conditions.



LIGHT DISTRIBUTION

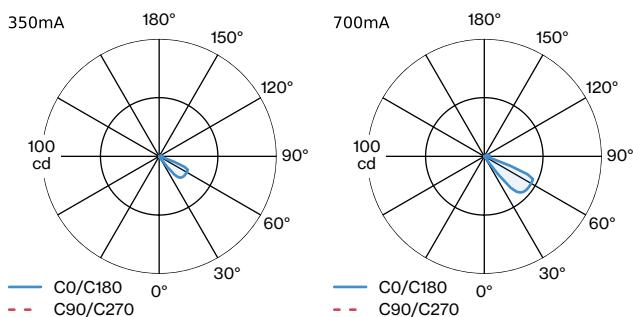

STRIPE

0.4

305151B4

MOUNTING

Plasterkit + Recessed Housing

TYPE	L·W·H (MM)	ORDERCODE
STRIPE 0.4 0.7	100·61·100	9 0 0 1 2 0 3 7

POWER SUPPLIES

Power Supply

TYPE	L·W·H (MM)	ORDERCODE
Driver 6W 350mA 3-22V	64·35·21	9 0 2 1 3 2 0 2
Driver 6W 700mA 3-8.4V	64·35·21	9 0 2 1 5 2 0 3